

INTERNATIONAL STANDARD

**Connectors for electrical and electronic equipment - Product requirements-
Part 8-110: Power connectors - Detail specification for 2P 300 A 1 000 V plus 2P
5 A 50 V DC shielded rectangular connectors with IP65/IP68 degree of protection
when mated and locked, and IPXXB when unmated**

CONTENTS

FOREWORD	4
1 Scope	7
2 Normative references	7
3 Terms and definitions	9
4 Technical information	9
4.1 Recommended method of termination	9
4.1.1 General	9
4.1.2 Number of contacts and contact cavities	10
4.2 Ratings and characteristics	10
4.3 Systems of levels	10
4.3.1 Performance levels	10
4.3.2 Compatibility levels	10
4.4 Classification into climatic categories	10
4.5 Clearance and creepage distance	11
4.6 Current-carrying capacity	11
4.7 Marking	11
5 Dimensional information	11
5.1 General	11
5.2 Isometric view and common features	11
5.2.1 Isometric view of fixed connector	11
5.2.2 Isometric view of free connector	12
5.3 Engagement (mating) information	12
5.3.1 General	12
5.3.2 Perpendicular to the engaging (mating) direction	12
5.3.3 Inclination	12
5.4 Fixed connectors	12
5.4.1 General	12
5.4.2 Dimensions	13
5.4.3 Terminations	15
5.5 Free connectors	15
5.5.1 General	15
5.5.2 Dimensions	16
5.5.3 Terminations	18
5.6 Accessories	18
5.7 Mounting information	18
5.8 Gauges – sizing gauges and retention force gauges	18
6 Technical characteristics	19
6.1 Classification into climatic categories	19
6.2 Electrical characteristics	20
6.2.1 Clearance and creepage distance	20
6.2.2 Voltage proof	20
6.2.3 Contact resistance	20
6.2.4 Housing (shell) electrical continuity and shielding effectiveness	20
6.2.5 Insulation resistance	21
6.2.6 Current-carrying capacity	21
6.2.7 Electrical load and temperature	21

6.3	Mechanical characteristics	22
6.3.1	Mechanical operation.....	22
6.3.2	Effectiveness of connector coupling devices	22
6.3.3	Gauge retention force (resilient contact)	22
6.3.4	Engaging and separating forces.....	22
6.3.5	Contact retention in insert.....	22
6.3.6	Polarizing and keying method	23
6.4	Dynamic stress tests	23
6.4.1	Vibration (sine).....	23
6.4.2	Shock	23
6.4.3	Free fall (repeated).....	23
6.4.4	IP degree of protection	24
6.4.5	Glow-wire flammability test method for end-products (GWEPT)	24
6.5	Climatic tests	24
6.5.1	Damp heat, steady state	24
6.5.2	Rapid change of temperature.....	24
6.5.3	Corrosion, salt mist.....	24
6.5.4	Dry heat	25
6.5.5	Cold	25
6.5.6	Low air pressure	25
6.6	Environmental aspects	25
6.6.1	Marking of insulation material (plastic).....	25
6.6.2	Design and use of material	25
7	Test schedules	25
7.1	General.....	25
7.2	Basic (minimum) test schedule	26
7.3	Full test schedule.....	26
7.3.1	Test group P – Preliminary	26
7.3.2	Test group AP – Dynamic climatic	27
7.3.3	Test group BP – Mechanical endurance.....	29
7.3.4	Test group CP – Moisture	30
7.3.5	Test group DP – Heat and electrical load.....	31
7.3.6	Test group EP – Dynamic stress	32
7.3.7	Test group FP – Chemical resistivity.....	33
7.3.8	Test group GP – Manufacturing process robustness	33
7.3.9	Test group HP – Signal integrity and shielding effectiveness tests	34
7.3.10	Test group JP – Connection.....	34
7.3.11	Test group KP – Additional test	35
7.4	Test procedures and measurement methods	36
7.5	Pre-conditioning.....	36
7.6	Wiring and mounting of test specimens	36
7.6.1	Wiring.....	36
7.6.2	Mounting	36
	Bibliography.....	37
	Figure 1 – Fixed connector – isometric view	11
	Figure 2 – Free connector – isometric view.....	12
	Figure 3 – Fixed connector	13

Figure 4 – Fixed connector codings	15
Figure 5 – Free connector.....	16
Figure 6 – Free connector codings.....	17
Figure 7 – Gauge for signal contacts	19
Figure 8 – Gauge for power contacts	19
Figure 9 – Current-temperature derating (70 mm ² wire size).....	21
Table 1 – Climatic category	10
Table 2 – Dimensions of fixed connector.....	14
Table 3 – Dimensions of fixed connector codings.....	15
Table 4 – Dimensions of free connector	17
Table 5 – Dimensions of free connector codings	18
Table 6 – Dimensions of gauges	19
Table 7 – Voltage proof.....	20
Table 8 – Vibration	23
Table 9 – Number of test specimens	26
Table 10 – Test group P	26
Table 11 – Test group AP	27
Table 12 – Test group BP	29
Table 13 – Test group CP	30
Table 14 – Test group DP	31
Table 15 – Test group EP	32
Table 16 – Test group GP	33
Table 17 – Test group HP	34
Table 18 – Test group JP	34
Table 19 – Test group KP	35

INTERNATIONAL ELECTROTECHNICAL COMMISSION

Connectors for electrical and electronic equipment - Product requirements -

Part 8-110: Power connectors - Detail specification for 2P 300 A 1 000 V DC plus 2P 5 A 50 V DC shielded rectangular connectors with IP65/IP68 degree of protection when mated and locked, and IPXXB when unmated

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61076-8-110 has been prepared by subcommittee 48B: Electrical connectors, of IEC technical committee 48: Electrical connectors and mechanical structures for electrical and electronic equipment. It is an International Standard.

The text of this International Standard is based on the following documents:

Draft	Report on voting
48B/3215/FDIS	48B/3221/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

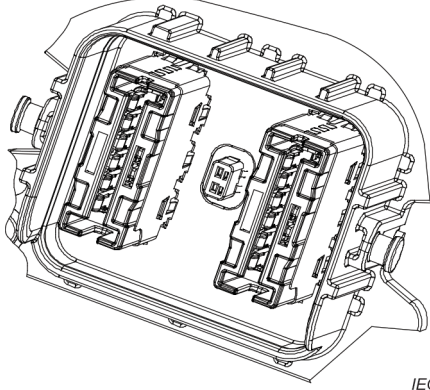
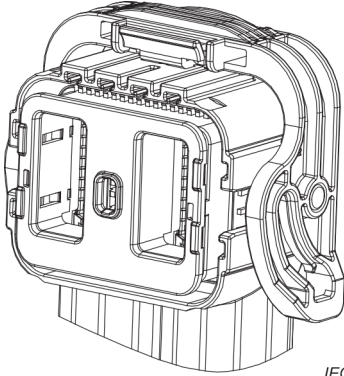
The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts of IEC 61076 series, under the general title *Connectors for electrical and electronic equipment - Product requirements*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

The International Electrotechnical Commission IEC SC 48B – Electrical connectors		IEC 61076-8-110 Ed.1
Detail specification in accordance with IEC 61076-1		
Fixed connector		For rated current of 300 A, 1 000 V DC; 2P power plus 2P signal (5 A, 50 V DC); Female contacts for power; Female contacts for signal; Straight insertion and withdrawal; 360° shielding; Four codings to prevent mismatching.
Free connector		For rated current of 300 A, 1 000 V DC; 2P power plus 2P signal (5 A, 50 V DC); Male contacts for power; First break last make male contacts for signal; Straight insertion and withdrawal; 360° shielding; Four codings to prevent mismatching.

1 Scope

This part of IEC 61076-8 describes free and fixed rectangular connectors, hereinafter referred to as "connector", with:

- 2P power plus 2P signal contacts;
- plastic housing with locking lever and four possible codings;
- 300 A rated current, 1 000 V DC rated voltage on the power section;
- 5 A rated current, 50 V DC rated voltage on the “first break, last make” signal section;
- individual shielding around each power contact with relevant shielding termination;
- IP65/IP68 degree of protection when mated and locked and IPXXB on both plug and receptacle parts when unmated,

for use in electrical and electronic equipment, including overall dimensions, interface dimensions, technical characteristics, performance requirements and test methods.

Connectors in accordance with this document are intended for use in class II equipment; hence, they are not equipped with PE contact.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-581, *International Electrotechnical Vocabulary (IEV) - Part 581: Electromechanical components for electronic equipment*

IEC 60068-1, *Environmental testing - Part 1: General and guidance*

IEC 60228, *Conductors of insulated cables*

IEC 60352 (all parts), *Solderless connections*

IEC 60512-1, *Connectors for electrical and electronic equipment - Tests and measurements - Part 1: Generic specification*

IEC 60512-1-1, *Connectors for electronic equipment - Tests and measurements - Part 1-1: General examination; Test 1a: Visual examination*

IEC 60512-1-2, *Connectors for electronic equipment - Test and measurements - Part 1-2: General examination - Test 1b: Examination of dimension and mass*

IEC 60512-2-1, *Connectors for electronic equipment - Tests and measurements - Part 2-1: Electrical continuity and contact resistance tests - Test 2a: Contact resistance - Millivolt level method*

IEC 60512-2-2, *Connectors for electronic equipment - Tests and measurements - Part 2-2: Electrical continuity and contact resistance tests - Test 2b: Contact resistance - Specified test current method*

IEC 60512-2-5, *Connectors for electronic equipment - Tests and measurements - Part 2-5: Electrical continuity and contact resistance tests; Test 2e: Contact disturbance*

IEC 60512-2-6, *Connectors for electronic equipment - Tests and measurements - Part 2-6: Electrical continuity and contact resistance tests - Test 2f: Housing (shell) electrical continuity*

IEC 60512-3-1, *Connectors for electronic equipment - Tests and measurements - Part 3-1: Insulation tests - Test 3a: Insulation resistance*

IEC 60512-4-1, *Connectors for electronic equipment - Tests and measurements - Part 4-1: Voltage stress tests - Test 4a: Voltage proof*

IEC 60512-5-2, *Connectors for electronic equipment - Tests and measurements - Part 5-2: Current-carrying capacity tests - Test 5b: Current-temperature derating*

IEC 60512-6-3, *Connectors for electronic equipment - Tests and measurements - Part 6-3: Dynamic stress tests - Test 6c: Shock*

IEC 60512-6-4, *Connectors for electronic equipment - Tests and measurements - Part 6-4: Dynamic stress tests - Test 6d: Vibration (sinusoidal)*

IEC 60512-7-1, *Connectors for electronic equipment - Tests and measurements - Part 7-1: Impact tests (free connectors) - Test 7a: Free fall (repeated)*

IEC 60512-9-1, *Connectors for electronic equipment - Tests and measurements - Part 9-1: Endurance tests - Test 9a: Mechanical operation*

IEC 60512-9-2, *Connectors for electronic equipment - Tests and measurements - Part 9-2: Endurance tests - Test 9b: Electrical load and temperature*

IEC 60512-11-1, *Connectors for electrical and electronic equipment - Tests and measurements - Part 11-1: Climatic tests - Test 11a - Climatic sequence*

IEC 60512-11-3, *Connectors for electronic equipment - Tests and measurements - Part 11-3: Climatic tests - Test 11c: Damp heat, steady state*

IEC 60512-11-4, *Connectors for electronic equipment - Tests and measurements - Part 11-4: Climatic tests - Test 11d: Rapid change of temperature*

IEC 60512-11-6, *Connectors for electronic equipment - Tests and measurements - Part 11-6: Climatic tests - Test 11f: Corrosion, salt mist*

IEC 60512-11-9, *Connectors for electronic equipment - Tests and measurements - Part 11-9: Climatic tests - Test 11i: Dry heat*

IEC 60512-11-10, *Connectors for electronic equipment - Tests and measurements - Part 11-10: Climatic tests - Test 11j: Cold*

IEC 60512-11-11, *Connectors for electronic equipment - Tests and measurements - Part 11-11: Climatic tests - Test 11k: Low air pressure*

IEC 60512-11-12, *Connectors for electronic equipment - Tests and measurements - Part 11-12: Climatic tests - Test 12m: Damp heat, cyclic*

IEC 60512-13-1, *Connectors for electronic equipment - Tests and measurements - Part 13-1: Mechanical operation tests - Test 13a: Engaging and separating forces*

IEC 60512-13-5, *Connectors for electronic equipment - Tests and measurements - Part 13-5: Mechanical operation tests - Test 13e: Polarizing and keying method*

IEC 60512-15-1, *Connectors for electronic equipment - Tests and measurements - Part 15-1: Connector tests (mechanical) - Test 15a: Contact retention in insert*

IEC 60512-15-6, *Connectors for electronic equipment - Tests and measurements - Part 15-6: Connector tests (mechanical) - Test 15f: Effectiveness of connector coupling devices*

IEC 60512-16-5, *Connectors for electronic equipment - Tests and measurements - Part 16-5: Mechanical tests on contacts and terminations - Test 16e: Gauge retention force (resilient contacts)*

IEC 60529:1989, *Degrees of protection provided by enclosures (IP code)*

IEC 60529:1989/AMD1:1999

IEC 60529:1989/AMD2:2013

IEC 60695-2-11:2021, *Fire hazard testing - Part 2-11: Glowing/hot-wire based test methods - Glow-wire flammability test method for end-products (GWEPT)*

IEC 60999 (all parts), *Connecting devices - Electrical copper conductors - Safety requirements for screw-type and screwless-type clamping units*

IEC 61076-1, *Connectors for electronic equipment - Product requirements - Part 1: Generic specification*

IEC 61984:2008, *Connectors - Safety requirements and tests*

IEC 62153-4-6, *Metallic cables and other passive components test methods - Part 4-6: Electromagnetic compatibility (EMC) Surface transfer impedance - injection method*

ISO 6508-1, *Metallic materials - Rockwell hardness test - Part 1: Test method*

ISO 21920-1, *Geometrical product specifications (GPS) - Surface texture: Profile - Part 1: Indication of surface texture*

Bibliography

IEC 60999-1, *Connecting devices - Electrical copper conductors - Safety requirements for screw-type and screwless-type clamping units - Part 1: General requirements and particular requirements for clamping units for conductors from 0,2 mm² up to 35 mm² (included)*

IEC 60999-2, *Connecting devices - Electrical copper conductors - Safety requirements for screw-type and screwless-type clamping units - Part 2: Particular requirements for clamping units for conductors above 35 mm² up to 300 mm² (included)*

IEC 62430, *Environmentally conscious design (ECD) - Principles, requirements and guidance*

IEC Guide 109, *Environmental aspects - Inclusion in electrotechnical product standards*

ISO 11469, *Plastics - Generic identification and marking of plastics products*
