



ISO/IEC 14776-372

Edition 1.0 2011-10

INTERNATIONAL STANDARD



**Information technology –Small computer system interface (SCSI) –
Part 372: Enclosure Services - 2 (SES-2)**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE **XA**

ICS 35.200

ISBN 978-2-88912-751-1

CONTENTS

FOREWORD.....	10
INTRODUCTION	12
1 Scope	14
2 Normative references	15
3 Terms, definitions, symbols, abbreviations, keywords and conventions	16
3.1 Terms and definitions	16
3.2 Symbols and abbreviations	20
3.3 Keywords	20
3.4 Conventions	21
4 SCSI enclosure services model	23
4.1 Access to the enclosure services process	23
4.1.1 Access to the enclosure services process overview	23
4.1.2 Standalone enclosure services process	23
4.1.3 Attached enclosure services process	24
4.2 Management of indicators and controls	25
4.3 Subenclosures	26
4.3.1 Subenclosures overview	26
4.3.2 Generation code	27
4.3.3 Simple subenclosures	28
4.3.4 Multiple enclosure services processes in a subenclosure.....	29
4.4 Use of the Enclosure Busy diagnostic page.....	29
4.5 Invalid field errors.....	29
4.6 Thresholds	30
4.7 Reporting methods.....	31
4.7.1 Reporting methods overview.....	31
4.7.2 Polling	31
4.7.3 Timed completion function	31
4.7.4 CHECK CONDITION status	31
4.7.5 Asynchronous event notification.....	32
4.8 Additional sense codes	32
5 Commands for enclosure services peripheral devices	34
6 Parameters for enclosure services devices.....	36
6.1 Diagnostic parameters	36
6.1.1 Diagnostic parameters overview	36
6.1.2 Configuration diagnostic page.....	38
6.1.3 Enclosure Control diagnostic page.....	41
6.1.4 Enclosure Status diagnostic page	43
6.1.5 Help Text diagnostic page.....	45
6.1.6 String Out diagnostic page.....	46
6.1.7 String In diagnostic page	47

6.1.8 Threshold Out diagnostic page	47
6.1.9 Threshold In diagnostic page	49
6.1.10 Element Descriptor diagnostic page	50
6.1.11 Short Enclosure Status diagnostic page	52
6.1.12 Enclosure Busy diagnostic page	52
6.1.13 Additional Element Status diagnostic page	53
6.1.14 Subenclosure Help Text diagnostic page	63
6.1.15 Subenclosure String Out diagnostic page	64
6.1.16 Subenclosure String In diagnostic page	65
6.1.17 Supported SES Diagnostic Pages diagnostic page	67
6.1.18 Download Microcode Control diagnostic page	67
6.1.19 Download Microcode Status diagnostic page	70
6.1.20 Subenclosure Nickname Control diagnostic page	73
6.1.21 Subenclosure Nickname Status diagnostic page	74
6.2 Log parameters for enclosure services devices	76
6.3 Mode parameters for enclosure services devices	77
6.3.1 Mode parameters overview	77
6.3.2 Enclosure Services Management mode page	78
7 Element definitions	79
7.1 Element definitions overview	79
7.2 Element formats	81
7.2.1 Element formats overview	81
7.2.2 Control element format	81
7.2.3 Status element format	82
7.2.4 Threshold control element format	83
7.2.5 Threshold status element format	84
7.3 Field definitions for all element types	84
7.3.1 Unspecified element	84
7.3.2 Device Slot element	85
7.3.3 Array Device Slot element	88
7.3.4 Power Supply element	90
7.3.5 Cooling element	92
7.3.6 Temperature Sensor element	94
7.3.7 Door Lock element	95
7.3.8 Audible Alarm element	96
7.3.9 Enclosure Services Controller Electronics element	98
7.3.10 SCC Controller Electronics element	99
7.3.11 Nonvolatile Cache element	100
7.3.12 Invalid Operation Reason element	101
7.3.13 Uninterruptible Power Supply element	103
7.3.14 Display element	105
7.3.15 Key Pad Entry element	107
7.3.16 Enclosure element	108
7.3.17 SCSI Port/Transceiver element	110
7.3.18 Language element	111
7.3.19 Communication Port element	113
7.3.20 Voltage Sensor element	114
7.3.21 Current Sensor element	115
7.3.22 SCSI Target Port element	117

7.3.23 SCSI Initiator Port element.....	118
7.3.24 Simple Subenclosure element.....	119
7.3.25 SAS Expander element.....	119
7.3.26 SAS Connector element.....	120
Bibliography	122

Figure 0 – SCSI document structure 12

Figure 1 – Standalone enclosure services process 24

Figure 2 – Attached enclosure services process 25

Figure 3 – Subenclosures 27

Figure 4 – Multiple enclosure service processes in a subenclosure 29

Table 1 – Numbering conventions	22
Table 2 – Sense keys and additional sense codes	33
Table 3 – Commands for standalone enclosure services processes	34
Table 4 – Diagnostic page codes for enclosure service devices	36
Table 5 – Configuration diagnostic page	38
Table 6 – Enclosure descriptor	39
Table 7 – Type descriptor header format	40
Table 8 – Enclosure Control diagnostic page	41
Table 9 – Control descriptor	42
Table 10 – Control element processing	43
Table 11 – Enclosure Status diagnostic page	43
Table 12 – Status descriptor	45
Table 13 – Help Text diagnostic page	46
Table 14 – String Out diagnostic page	46
Table 15 – String In diagnostic page	47
Table 16 – Threshold Out diagnostic page	48
Table 17 – Threshold control descriptor	48
Table 18 – Threshold In diagnostic page	49
Table 19 – Threshold status descriptor	50
Table 20 – Element Descriptor diagnostic page	51
Table 21 – Element descriptor by type descriptor	51
Table 22 – Overall descriptor format and element descriptor format	52
Table 23 – Short Enclosure Status diagnostic page	52
Table 24 – Enclosure Busy diagnostic page	52
Table 25 – Additional Element Status diagnostic page	54
Table 26 – Additional Element Status descriptor with the EIP bit set to one	54
Table 27 – Additional Element Status descriptor with the EIP bit set to zero	54
Table 28 – Additional Element Status descriptor protocol-specific information for Fibre Channel with the EIP bit set to one	55
Table 29 – Additional Element Status descriptor protocol-specific information for Fibre Channel with the EIP bit set to zero	56
Table 30 – Port descriptor	56
Table 31 – BYPASS REASON field	57
Table 32 – Additional Element Status descriptor protocol-specific information for SAS	58
Table 33 – DESCRIPTOR TYPE field	58
Table 34 – Additional Element Status descriptor protocol-specific information for Device Slot elements and Array Device Slot elements for SAS with the EIP bit set to one	58
Table 35 – Additional Element Status descriptor protocol-specific information for Device Slot elements and Array Device Slot elements for SAS with the EIP bit set to zero	59
Table 36 – Phy descriptor	59
Table 37 – Additional Element Status descriptor protocol-specific information for SAS Expander elements	61
Table 38 – Expander phy descriptor	61

Table 39 – Additional Element Status descriptor protocol-specific information for SCSI Initiator Port, SCSI Target Port, and Enclosure Services Controller Electronics elements for SAS	62
Table 40 – Phy descriptor	62
Table 41 – Subenclosure Help Text diagnostic page	63
Table 42 – Subenclosure help text format	64
Table 43 – Subenclosure String Out diagnostic page	65
Table 44 – Subenclosure String In diagnostic page	66
Table 45 – Subenclosure string in data format	66
Table 46 – Supported SES Diagnostic Pages diagnostic page	67
Table 47 – Download Microcode Control diagnostic page	68
Table 48 – DOWNLOAD MICROCODE MODE field	69
Table 49 – Download Microcode Status diagnostic page	71
Table 50 – Download microcode status descriptor format	71
Table 51 – SUBENCLOSURE DOWNLOAD MICROCODE STATUS field	72
Table 52 – Subenclosure Nickname Control diagnostic page	74
Table 53 – Subenclosure Nickname Status diagnostic page	75
Table 54 – Subenclosure nickname status descriptor format	75
Table 55 – SUBENCLOSURE NICKNAME STATUS field	76
Table 56 – Log page codes for enclosure services devices	76
Table 57 – Mode page codes for enclosure services devices	77
Table 58 – Enclosure Services Management mode page	78
Table 59 – Element type codes	80
Table 60 – Control element format	81
Table 61 – Status element format	82
Table 62 – ELEMENT STATUS CODE field	82
Table 63 – ELEMENT STATUS CODE field usage in an overall status element	83
Table 64 – Threshold control element format	83
Table 65 – Threshold status element format	84
Table 66 – Unspecified control element	84
Table 67 – Unspecified status element	85
Table 68 – Device Slot control element	85
Table 69 – Device Slot status element	86
Table 70 – SLOT ADDRESS field	86
Table 71 – Array Device Slot control element	88
Table 72 – Array Device Slot status element	89
Table 73 – Power Supply control element	90
Table 74 – Power Supply status element	91
Table 75 – Cooling control element	92
Table 76 – REQUESTED SPEED CODE field	93
Table 77 – Cooling status element	93
Table 78 – ACTUAL SPEED CODE field	94
Table 79 – Temperature Sensor threshold control element field definitions	94

Table 80 – Temperature Sensor threshold status element field definitions	94
Table 81 – Temperature Sensor control element	94
Table 82 – Temperature Sensor status element	95
Table 83 – Door Lock control element	96
Table 84 – Door Lock status element	96
Table 85 – Audible Alarm control element	96
Table 86 – Audible Alarm status element	97
Table 87 – Enclosure Services Controller Electronics control element	98
Table 88 – Enclosure Services Controller Electronics status element	99
Table 89 – SCC Controller Electronics control element	99
Table 90 – SCC Controller Electronics status element	100
Table 91 – Nonvolatile Cache control element	100
Table 92 – Nonvolatile Cache status element	100
Table 93 – SIZE MULTIPLIER field and NONVOLATILE CACHE SIZE field	101
Table 94 – Invalid Operation Reason threshold control element field definitions	101
Table 95 – Invalid Operation Reason threshold status element field definitions	101
Table 96 – Invalid Operation Reason control element	102
Table 97 – Invalid Operation Reason status element	102
Table 98 – INVOP TYPE field	102
Table 99 – Invalid Operation Reason status element with the INVOP TYPE field set to 00b	102
Table 100 – Invalid Operation Reason status element with the INVOP TYPE field set to 01b	103
Table 101 – Invalid Operation Reason status element with the INVOP TYPE field set to 11b	103
Table 102 – Uninterruptible Power Supply threshold control element field definitions	103
Table 103 – Uninterruptible Power Supply threshold status element field definitions	104
Table 104 – Uninterruptible Power Supply control element	104
Table 105 – Uninterruptible Power Supply status element	104
Table 106 – BATTERY STATUS field	104
Table 107 – Display control element	106
Table 108 – DISPLAY MODE field	106
Table 109 – Display status element	106
Table 110 – DISPLAY MODE STATUS field	107
Table 111 – Key Pad Entry control element	107
Table 112 – Key Pad Entry status element	107
Table 113 – Enclosure control element	108
Table 114 – POWER CYCLE REQUEST field	108
Table 115 – POWER CYCLE DELAY field	108
Table 116 – POWER OFF DURATION field	109
Table 117 – Enclosure status element	109
Table 118 – TIME UNTIL POWER CYCLE field	109
Table 119 – REQUESTED POWER OFF DURATION field	110
Table 120 – SCSI Port/Transceiver control element	110
Table 121 – SCSI Port/Transceiver status element	111

Table 122 – Language control element	111
Table 123 – LANGUAGE CODE field	112
Table 124 – Language status element	112
Table 125 – LANGUAGE CODE field	113
Table 126 – Communication Port control element	113
Table 127 – Communication Port status element	113
Table 128 – Voltage Sensor threshold control element field definitions	114
Table 129 – Voltage Sensor threshold status element field definitions	114
Table 130 – Voltage Sensor control element	114
Table 131 – Voltage Sensor status element	115
Table 132 – Current Sensor threshold control element field definitions	115
Table 133 – Current Sensor threshold status element field definitions	116
Table 134 – Current Sensor control element	116
Table 135 – Current Sensor status element	116
Table 136 – SCSI Target Port control element	117
Table 137 – SCSI Target Port status element	117
Table 138 – SCSI Initiator Port control element	118
Table 139 – SCSI Initiator Port status element	118
Table 140 – Simple Subenclosure control element	119
Table 141 – Simple Subenclosure status element	119
Table 142 – SAS Expander control element	119
Table 143 – SAS Expander status element	120
Table 144 – SAS Connector control element	120
Table 145 – SAS Connector status element	120
Table 146 – CONNECTOR TYPE field	121

INFORMATION TECHNOLOGY – SMALL COMPUTER SYSTEM INTERFACE (SCSI) –

Part 372: Enclosure Services - 2 (SES-2)

FOREWORD

- 1) ISO (International Organization for Standardization) and IEC (International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of International Standards. Their preparation is entrusted to technical committees; any ISO and IEC member body interested in the subject dealt with may participate in this preparatory work. International governmental and non-governmental organizations liaising with ISO and IEC also participate in this preparation.
- 2) In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75 % of the national bodies casting a vote.
- 3) The formal decisions or agreements of IEC and ISO on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC and ISO member bodies.
- 4) IEC, ISO and ISO/IEC publications have the form of recommendations for international use and are accepted by IEC and ISO member bodies in that sense. While all reasonable efforts are made to ensure that the technical content of IEC, ISO and ISO/IEC publications is accurate, IEC or ISO cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 5) In order to promote international uniformity, IEC and ISO member bodies undertake to apply IEC, ISO and ISO/IEC publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any ISO/IEC publication and the corresponding national or regional publication should be clearly indicated in the latter.
- 6) ISO and IEC provide no marking procedure to indicate their approval and cannot be rendered responsible for any equipment declared to be in conformity with an ISO/IEC publication.
- 7) All users should ensure that they have the latest edition of this publication.
- 8) No liability shall attach to IEC or ISO or its directors, employees, servants or agents including individual experts and members of their technical committees and IEC or ISO member bodies for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication of, use of, or reliance upon, this ISO/IEC publication or any other IEC, ISO or ISO/IEC publications.
- 9) Attention is drawn to the normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 10) Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

International Standard ISO/IEC 14776-372 was prepared by subcommittee 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

The list of all currently available parts of the ISO/IEC 14776 series, under the general title *Information technology – Small computer system interface (SCSI)*, can be found on the IEC web site.

This International Standard has been approved by vote of the member bodies and the voting results may be obtained from the address given on the second title page.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

IMPORTANT – The ‘colour inside’ logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its content. Users should therefore print this document using a colour printer.

INTRODUCTION

This International Standard documents the commands and parameters necessary to manage and sense the state of the power supplies, cooling devices, displays, indicators, individual drives, and other non-SCSI elements installed in an enclosure. The command set uses the SCSI SEND DIAGNOSTIC and RECEIVE DIAGNOSTIC RESULTS commands (see SPC-4) to obtain configuration information for the enclosure and to set and sense standard bits for each type of element that may be installed in the enclosure.

The standard is organized as follows:

- Clause 1 Scope describes the relationship of this standard to the SCSI family of standards.
- Clause 2 Normative references provide references to other standards and documents.
- Clause 3 Definitions, symbols, abbreviations, and conventions describe terms and conventions used throughout this standard.
- Clause 4 SCSI enclosure services model describes the model for SCSI enclosure services peripheral devices, both standalone and attached.
- Clause 5 Commands for enclosure services peripheral devices define the command set for a SCSI enclosure services peripheral device.
- Clause 6 Parameters for enclosure services devices define diagnostic pages, log pages, and mode parameters and pages specific to SCSI enclosure services peripheral devices.
- Clause 7 Element definitions define elements used by several of the diagnostic pages.

SCSI standards family

Figure 0 shows the relationship of this standard to the other standards and related projects in the SCSI family of standards as of the publication of this standard.

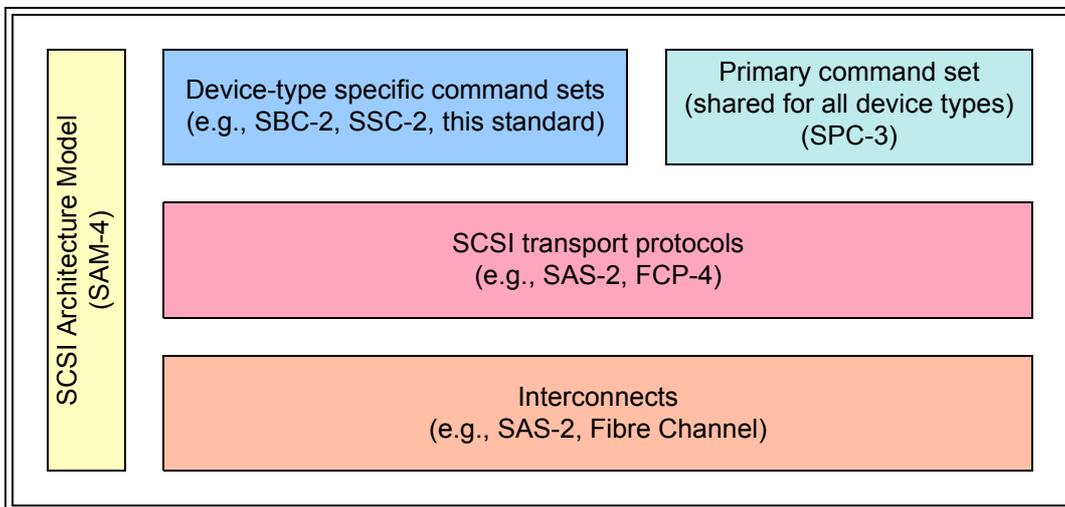


Figure 0 — SCSI document structure

The SCSI document structure in figure 0 is intended to show the general applicability of the documents to one another. Figure 0 is not intended to imply a relationship such as a hierarchy, protocol stack, or system architecture.

SCSI Architecture Model: Defines the SCSI systems model, the functional partitioning of the SCSI standard set and requirements applicable to all SCSI implementations and implementation standards.

Device-Type Specific Command Sets: Implementation standards that define specific device types including a device model for each device type. These standards specify the required commands and behaviors that are specific to a given device type and prescribe the requirements to be followed by a SCSI initiator device when sending commands to a SCSI target device having the specific device type.

The commands and behaviors for a specific device type may include reference commands and behaviors that are shared by all SCSI devices.

Shared Command Set: An implementation standard that defines a model for all SCSI device types. This standard specifies the required commands and behavior that is common to all SCSI devices, regardless of device type, and prescribes the requirements to be followed by a SCSI initiator device when sending commands to any SCSI target device.

SCSI Transport Protocols: Implementation standards that define the requirements for exchanging information so that different SCSI devices are capable of communicating.

Interconnects: Implementation standards that define the communications mechanism employed by the SCSI transport protocols. These standards may describe the electrical and signalling requirements essential for SCSI devices to interoperate over a given interconnect. Interconnect standards may allow the interconnection of devices other than SCSI devices in ways that are outside the scope of this standard.

The term SCSI is used to refer to the family of standards described in this subclause.

INFORMATION TECHNOLOGY – SMALL COMPUTER SYSTEM INTERFACE (SCSI) –

Part 372: Enclosure Services - 2 (SES-2)

1 Scope

This part of ISO/IEC 14776 documents the commands and parameters necessary to manage and sense the state of the power supplies, cooling devices, displays, indicators, individual drives, and other non-SCSI elements installed in an enclosure. The command set uses the SCSI SEND DIAGNOSTIC and RECEIVE DIAGNOSTIC RESULTS commands (see SPC-4) to obtain configuration information for the enclosure and to set and sense standard bits for each type of element that may be installed in the enclosure.

The following concepts from SES are made obsolete by this standard:

- a) Array Control and Array Status diagnostic pages (page code 06h); and
- b) secondary subenclosure support in the Help Text, String Out, and String In diagnostic pages.

The set of SCSI standards specifies the interfaces, functions, and operations necessary to ensure interoperability between conforming SCSI implementations. This standard is a functional description. Conforming implementations may employ any design technique that does not violate interoperability.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

The provisions of the referenced specifications other than ISO/IEC, IEC, ISO and ITU documents, as identified in this clause, are valid within the context of this International Standard. The reference to such a specification within this International Standard does not give it any further status within ISO/IEC. In particular it does not give the referenced specifications the status of an International Standard.

ISO 639-1:2002, *Codes for the representation of names of languages – Part 1: Alpha-2 code*

ISO/IEC 8859-1:1998, *Information technology - 8-bit single-byte coded graphic character sets – Part 1: Latin alphabet No. 1*

ISO/IEC 10646:2003, *Information technology – Universal Multiple-Octet Coded Character Set (UCS)*

ISO/IEC 14165-122:2005, *Information technology – Fibre channel – Part 122: Arbitrated loop - 2 (FC-AL-2)*¹

ISO/IEC 14776-342:2000, *Information technology – Small computer system interface (SCSI) – Part 342: Controller Commands - 2 (SCC-2)*²

ISO/IEC 14776-414, *Information technology – Small computer system interface (SCSI) – Part 414: Architecture Model - 4 (SAM-4)*³

T10/1760-D, *Information technology – Serial Attached SCSI - 2 (SAS-2)*

T10/1828-D, *Information technology – Fibre Channel Protocol - 4 (FCP-4)*

T10/1731-D, *Information technology – SCSI Primary Commands - 4 (SPC-4)*

NOTE 1 For more information on the current status of T10 documents, contact the INCITS Secretariat at 202-737-8888 (phone), 202-638-4922 (fax) or via Email at incits@itic.org. To obtain copies of this document, contact Global Engineering at 15 Inverness Way, East Englewood, CO 80112-5704 at 303-792-2181 (phone), 800-854-7179 (phone), or 303-792-2192 (fax), or see <http://www.incits.org>.

Serial ATA 2.6 (SATA-2) specification. 15 February 2007

NOTE 2 For information on the current status of Serial ATA documents, see the Serial ATA International Organization at <http://www.sata-io.org>.

1. ANSI INCITS 332-1999
2. ANSI INCITS 318-1998
3. T10/1683_D